

UR75 5G Industrial Router



Adopting high-performance industrial platform of quad-core CPU and cellular module, UR75 is capable of providing wire-speed network and ultra-small package to ensure the extremely safe and reliable connection to the wireless network. Upgraded to the latest cellular technology - 5G, the UR75 makes itself possible to enjoy ultra-fast broadband access with 5G cellular network.

Meanwhile, UR75 also supports 5-port Gigabit Ethernet switch, serial ports (RS232/RS485) and DI/DO (Digital input/Digital output), which enable you to scale up M2M application combining data and video in limited time and budget.

UR75 is particularly suitable for smart grid, digital media installations, industrial automation, telemetry equipment, medical device, digital factory, finance, payment device, environment protection, water conservancy and so on.

◆ Benefits

- Qualcomm quad-core CPU with big memory; SSD is available to support further development and customize requirements
- Global 5G (NSA/SA)/4G LTE network with dual SIM cards for backup between multiple carrier networks
- Gigabit Ethernet ports for lightning transmission of data
- Embedded Python SDK for secondary development
- Flexible modular design provides users with different connection modules like Ethernet, I/O, serial port, Wi-Fi, GPS for connecting diverse field assets
- Rugged enclosure, optimized for DIN rail or shelf mounting
- 3-year warranty included

◆ Security & Reliability

- Quickly develop functions with Function Compute and deploy them seamlessly to edge nodes
- Automated failover/failback between Ethernet, Cellular (dual SIM) and Wi-Fi
- Enable unit with security frameworks like IPsec/OpenVPN/GRE/L2TP/PPTP/DMVPN
- Embed hardware watchdog, able to automatically recover from various failure, ensure highest level of availability
- DeviceHub provides easy setup, mass configuration, and centralized management of remote devices


◆ Capabilities

- The device data can be aggregated and cleaned locally, and the processed data can be transmitted to the Cloud for storage and analysis.
- It can be continuously running in a broken or weak network environment, and the latest data can be synchronized to the Cloud after the network is restored
- Link remote devices in an environment where communication technologies are constantly changing
- Support 802.11 a/b/g/n/ac, as AP or client mode, to establish versatile wireless network or be the backup WAN link for 5G/4G
- Support rich protocols like SNMP, Modbus bridging, RIP, OSPF


◆ Easy Maintenance

- The user-friendly web interface design and more than one option of upgrade help administrator to manage the device as easy as pie
- WEB GUI and CLI enable the admin to achieve simple management and quick configuration among a large quantity of devices
- Efficiently manage the remote routers on the existing platform through the industrial standard SNMP

◆ Application Example

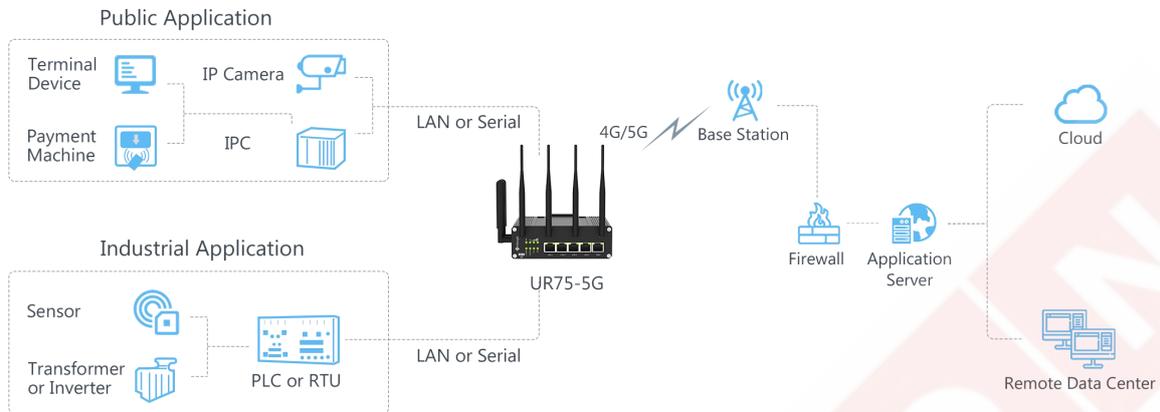

◆ Dimensions(mm)

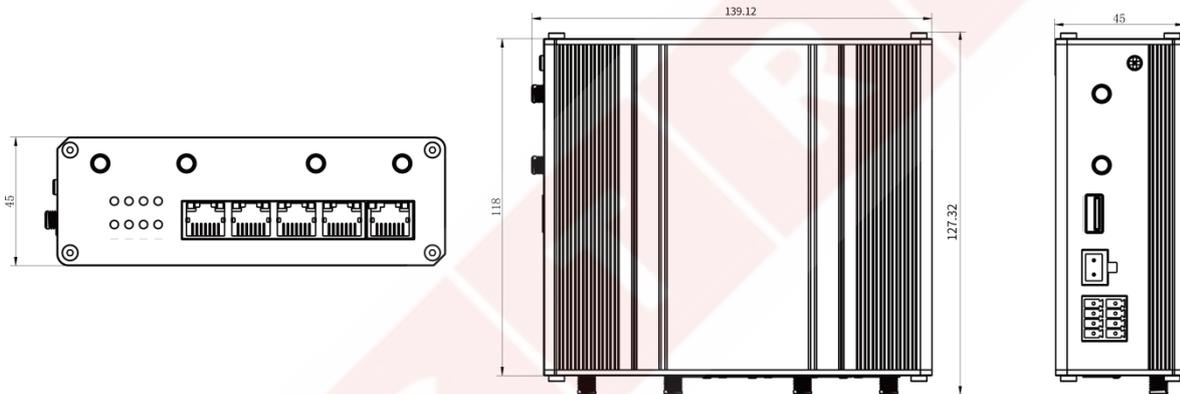

◆ Specifications

Hardware System

CPU	Qualcomm Quad-core ARM Cortex-A7, 716.8 MHz
Memory	512 MB DDR3 RAM and 8GB Flash
Extendable Storage	1 × M.2 NVMe SSD Interface

Cellular Interface

Antenna	UR75-5G: 4 × 50 Ω SMA Connectors (Center PIN: SMA Female) UR75-4G: 2 × 50 Ω SMA Connectors (Center PIN: SMA Female)
SIM Slots	2 (Mini SIM-2FF)

Ethernet Interface

Numbers	5 × 10/100/1000 Mbps
Property	1 × WAN +4 × LAN
Mode	Full or half duplex (Auto-Sensing)
PoE	4 × 802.3 af/at PoE PSE on LAN Ports (Optional)

Wi-Fi Interface

Antenna 2 × 50 Ω SMA Connectors (Center PIN: RP-SMA Female)

Standards IEEE 802.11 b/g/n, 2.4GHz

IEEE 802.11 a/n/ac, 5GHz

Tx Power 2.4G: 26dBm(max)

5G: 26.4dBm(max)

Rx Sensitivity

2.4G

802.11b: ≤ -92dBm@11Mbps

802.11g: ≤ -78dBm@54Mbps

802.11ac VHT20: ≤ -91dBm@MCS0

802.11ac VHT20: ≤ -66dBm@MCS8

802.11ac VHT40: ≤ -88.5dBm@MCS0

802.11ac VHT40: ≤ -64dBm@MCS8

5G

802.11a: ≤ -91dBm@6Mbps

802.11a: ≤ -76dBm@54Mbps

802.11ac VHT20: ≤ -90dBm@MCS0

802.11ac VHT20: ≤ -68dBm@MCS8

802.11ac VHT40: ≤ -87dBm@MCS0

802.11ac VHT40: ≤ -65dBm@MCS9

802.11ac VHT80: ≤ -84dBm@MCS0

802.11ac VHT80: ≤ -60dBm@MCS9

Modes AP and Client mode

Security WPA/WPA2 authentication, WEP/TKIP/AES encryption

GPS

Antenna 1 × 50 Ω SMA Connector (Center PIN: SMA Female)

Sensitivity -167dBm@Tracking, -149dBm@Acquisition, -161dBm@Re-acquisition

Position Accuracy <2.5m CEP

Protocol NMEA0183, PMTK

Serial Interface

Numbers 1 × RS232 + 1 × RS485 (2 × RS485 Optional)

Connector 3.5mm Terminal Block

Baud Rate 300bps to 230400bps

DI/DO

Numbers 1 × DI (dry contact) + 1 × DO (wet contact), galvanic isolation

Connector 3.5mm Terminal Block

Maximum V/A 0.3A@30VDC (DO)

Others

Reset Button 1 × RESET

USB 1 × USB 2.0 (Reserved)

LED Indicators 1 × POWER, 1 × SYSTEM, 1 × VPN, 1 × WLAN, 1 × SIM, 3 × Signal strength

Built-in Watchdog, RTC, Timer

Software

Network Protocols PPP, PPPoE, SNMP v1/v2c/v3, TCP, UDP, DHCP, RIPv1/v2, OSPF, DDNS, VRRP, HTTP, HTTPS, DNS, ARP, QOS, SNTP, Telnet, VLAN, SSH, etc.

VPN DMVPN, IPsec, OpenVPN, PPTP, L2TP, GRE

Security Access Control, DMZ, Port Mapping, MAC Binding, SPI Firewalls, DoS&DDoS Protection, Filtering(IP&Domain), IP Passthrough

Management Web, CLI, SMS, On-demand dial up, SNMP v1/v2/v3, Devicehub

AAA Radius, Tacacs+, LDAP, Local Authentication

Multilevel Authority Multiple Levels of User Authority

Reliability VRRP, WAN Failover, Dual SIM Backup

Serial Port Transparent(TCP Client/Server, UDP), Modbus Master/Slave, Modbus Gateway (Modbus RTU to Modbus TCP)

Power Supply and Consumption

Power Connector 3-pin 5.08 mm Terminal Block

Input Voltage 9-48 VDC, with Surge-Protection and Reverse Polarity Protection

Power Consumption ≤ 7.9W (In Non-PoE mode)

Physical Characteristics

Ingress Protection IP30

Housing Metal

Dimension 135 x 118 x 45 mm (5.31 x 4.65 x 1.77 in)

Installation Desktop, Wall or DIN Rail Mounting

Environmental

Operating Temperature -40°C to +70°C (-40°F to +158°F) Reduced Cellular Performance Above 60°C

Storage Temperature -40°C to +85°C (-40°F to +185°F)

Ethernet Isolation 1.5 kV RMS

Relative Humidity 0% to 95% (non-condensing) at 25°C/77°F

◆ Ordering Information

Model	Module	Frequency Bands*	Wi-Fi	GPS	PoE
UR75-500 GL	5G	N1/N2/N3/N5/N7/N8/N12/N20/N28/N41/N66 /N71/N77/N78/N79@5G NR, B1/B2/B3/B4/B5/B7/B8/B9/B12/B13/B14/B17 /B18/B19/B20/B21(TBD)/B25/B26/B28/B29/B3 0/B32/B66/B71@LTE FDD, B34/B38/39/B40/B41/B42/B48@LTE TDD	Yes	Coming soon	Optional
UR75-L0xx	4G LTE (Cat 4)	- E : B1/B3/B5/B7/B8/B20@LTE FDD,B38/B40 /B41@LTE TDD, B1/B5/B8@WCDMA, B3/B8 @GSM - AF : B2/B4/B5/B12/B13/B14/B66/B71@LTE FDD, B2/B4/B5@WCDMA - AU : B1/B2/B3/B4/B5/B7/B8/B28@LTE FDD, B40@LTE TDD, B1/B2/B5/B8@WCDMA, B2/B3/B5/B8@GSM - CE : B1/B3/B5/B8@LTE FDD, B38/B39/B40/B41 @LTE TDD, B1/B8@WCDMA, B34/B39 @TD-SCDMA, BC0@CDMA2000 1×/EVDO, B3/B8@GSM	Yes	Optional	Optional